

## VIDEO PRODUCTION

32 Input x 16 Output Switcher available upon request

## LENSES

- (3) FUJINON, XA88x8.8ESM
- (1) FUJINON, XA99x8.4ESM
- (1) FUJINON, HA14x4.5BE2D w/ Servo
- (3) Canon 22x w/ semi Servo

## MICROPHONES

- (6) Senn. Com Headsets HMD25
- (10) Sony ECM-77B Lavs
- (6) Senn. MKH 416
- (2) Senn. MKH 70 Shotgun
- (2) Senn. ME 66
- (6) Audio-Technica AT815b
- (8) Senn. MD46

## AUDIO CONSOLE

- Calrec Brio36 36 fader digital console
- 96 DSP Channels
- 2 AoIP ST2110-30 Hydra2 I/O
- 256 Mono In / 256 Mono Out
- 1 Analog Hydra2 I/O
- 32 Analog In / 32 Analog Out
- 1 AES Hydra2 I/O
- 32 AES In / 32 AES Out

## INTERCOM / COMMUNICATIONS

- RTS Adam Intercom 56x56 matrix w/8 IFB Channels
- 8 Assignable 2-W drops
- 15 BP325 Beltpacks
- 11 intercom positions
- 12 4030 IFB Beltpacks
- RTS SAP 1626 Source Panel
- (8) Telephone Hybrids

## CAMERAS

- (5) Sony HDC1500R Cameras 1080i/720p switchable
- (7) HDCU1000 Camera Base Station w/ Joystick OCP
- (5) 2" Handheld viewfinders
- (2) HDLA1500B1 Lens Adapter
- (2) HDC-1000 Hard Camera Head
- (2) 7" Build-Up viewfinders
- (2) HD POV Cams


Motorola Radio analog/digital system w/ (1) Base station (RTS Interfaced) (6) Portable Radios

## AUDIO EQUIPMENT

- (2) DigiCart/E w/ 1x Zip & 1x SD
- (1) CD Player

## SYSTEM EQUIPMENT

- Evertz IPX-128 Core Switch (ST2110) w/ 86 Inputs x 96 3G Outputs
- (6) Evertz EvEdge-UDX3G Frame Syncs
- (8) Utility AJA Frame Syncs
- Virtual Monitor Wall via IP VIP36 Multiviewer
- (1) Decimator Quad split generators
- (2) Multiviewer Heads from Switcher

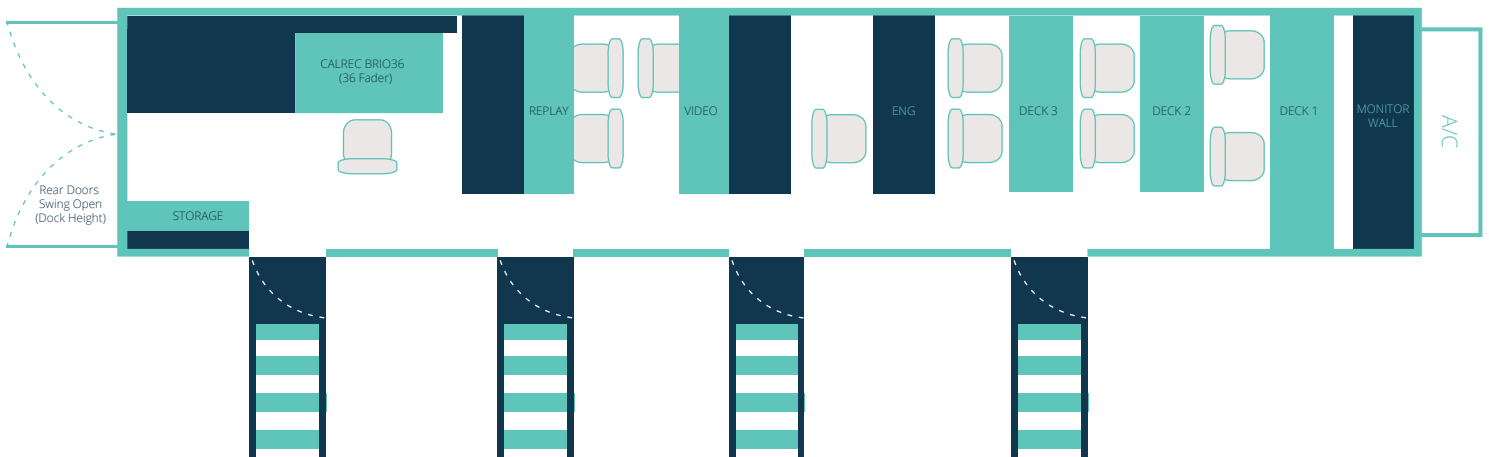

Mobile: 48' L x 13'-6" H x 8'-5" W  
Footprint: 63' L x 13'-6" H x 20' W  
Stairs: 2x sets, 2x platforms  
Recommended: 25' W

1x208V 3-Phase 200 Amp

## Spring Cable Count

Date: 11/22/2018

DT 12	Quantity	Total in Feet
50'	1	50
100'	2	200
165'	10	1650
330'	3	990
		<b>2840</b>

POWER	Quantity	Total in Feet
65' 2 Ø Blue	2	130
65' 2 Ø Red	2	130
65' 2 Ø Black	2	130
65' 2 Ø Green	2	130
100' 2 Ø Blue	1	100
100' 2 Ø Red	1	100
100' 2 Ø Black	1	100
100' 2 Ø Green	1	100

TRIAx	Quantity	Total in Feet
50'	10	500
100'	7	700
250'	4	1000
330'	6	1980
500'	2	1000
165' 4LINE	3	495
		<b>5675</b>

TAC	Quantity	Total in Feet
TAC4 500'	1	475

SMPTE	Quantity	Total in Feet
15'	10	150
165'	2	330
250'	3	750
300'	1	300
330'	2	660
		<b>2190</b>

VIDEO MULT	Quantity	Total in Feet
100' 10LINE	2	200
165' 10LINE	2	330
300' 5LINE	1	300
		<b>830</b>



# SPRING

-  1 Blue Jays Way, Suite 3400  
Toronto, ON Canada M5V 1J3
-  416-341-2001
-  416-341-2136
-  [info@domeproductions.com](mailto:info@domeproductions.com)

			PVW			PGM	